

深圳市壹壹自动化设备有限公司

Shenzhen Yiyi Automation Equipment Co., Ltd.

目录/content



公司介绍

Company Introduction



功能介绍

Function Introduction



技术规格

Technical Specifications



公司荣誉

Company Honors



公司介绍

Company Introduction

公司简介 COMPANY INTRODUCE

壹壹自动化起源于2018年，是由一支在脱泡搅拌机行业从业10年之久的专业团队组建而成，公司总部位于中国深圳市，是一家国家高新技术企业，在国内拥有多家代理商。公司成立以来，一直致力于真空脱泡搅拌机的研发、生产与销售，为各行各业提供高效节能的脱泡搅拌机方案和产品，立志成为全国乃至全球一流的脱泡搅拌机制造商。

Yiyi Automation originated in 2018 and was formed by a professional team with 10 years of experience in the defoaming mixer industry. The company is headquartered in Shenzhen, China and is a national high-tech enterprise with multiple agents in China. Since its establishment, the company has been committed to the research and development, production, and sales of vacuum defoaming mixers, providing efficient and energy-saving defoaming mixer solutions and products for various industries, and aspiring to become a first-class defoaming mixer manufacturer in China and even the world.

壹壹自动化



使命Mission

为全球提供高品质自动化设备

To provide high-quality
automation equipment globally.

经营理念

Business Philosophy

以客户为中心，坚持品质保证

Customer-centric, adhering to
quality assurance.

企业文化

corporate culture

愿景Vision

成为全球真空脱泡搅拌设备领导品牌

To become the global leader in vacuum
mixing and degassing equipment.


核心价值Core Values

专注一个行业，坚持“一心一意”

做好设备 Focusing on one
industry, adhering to the principle of
"devoting wholeheartedly to making
good equipment."



企业服务 Enterprise Services

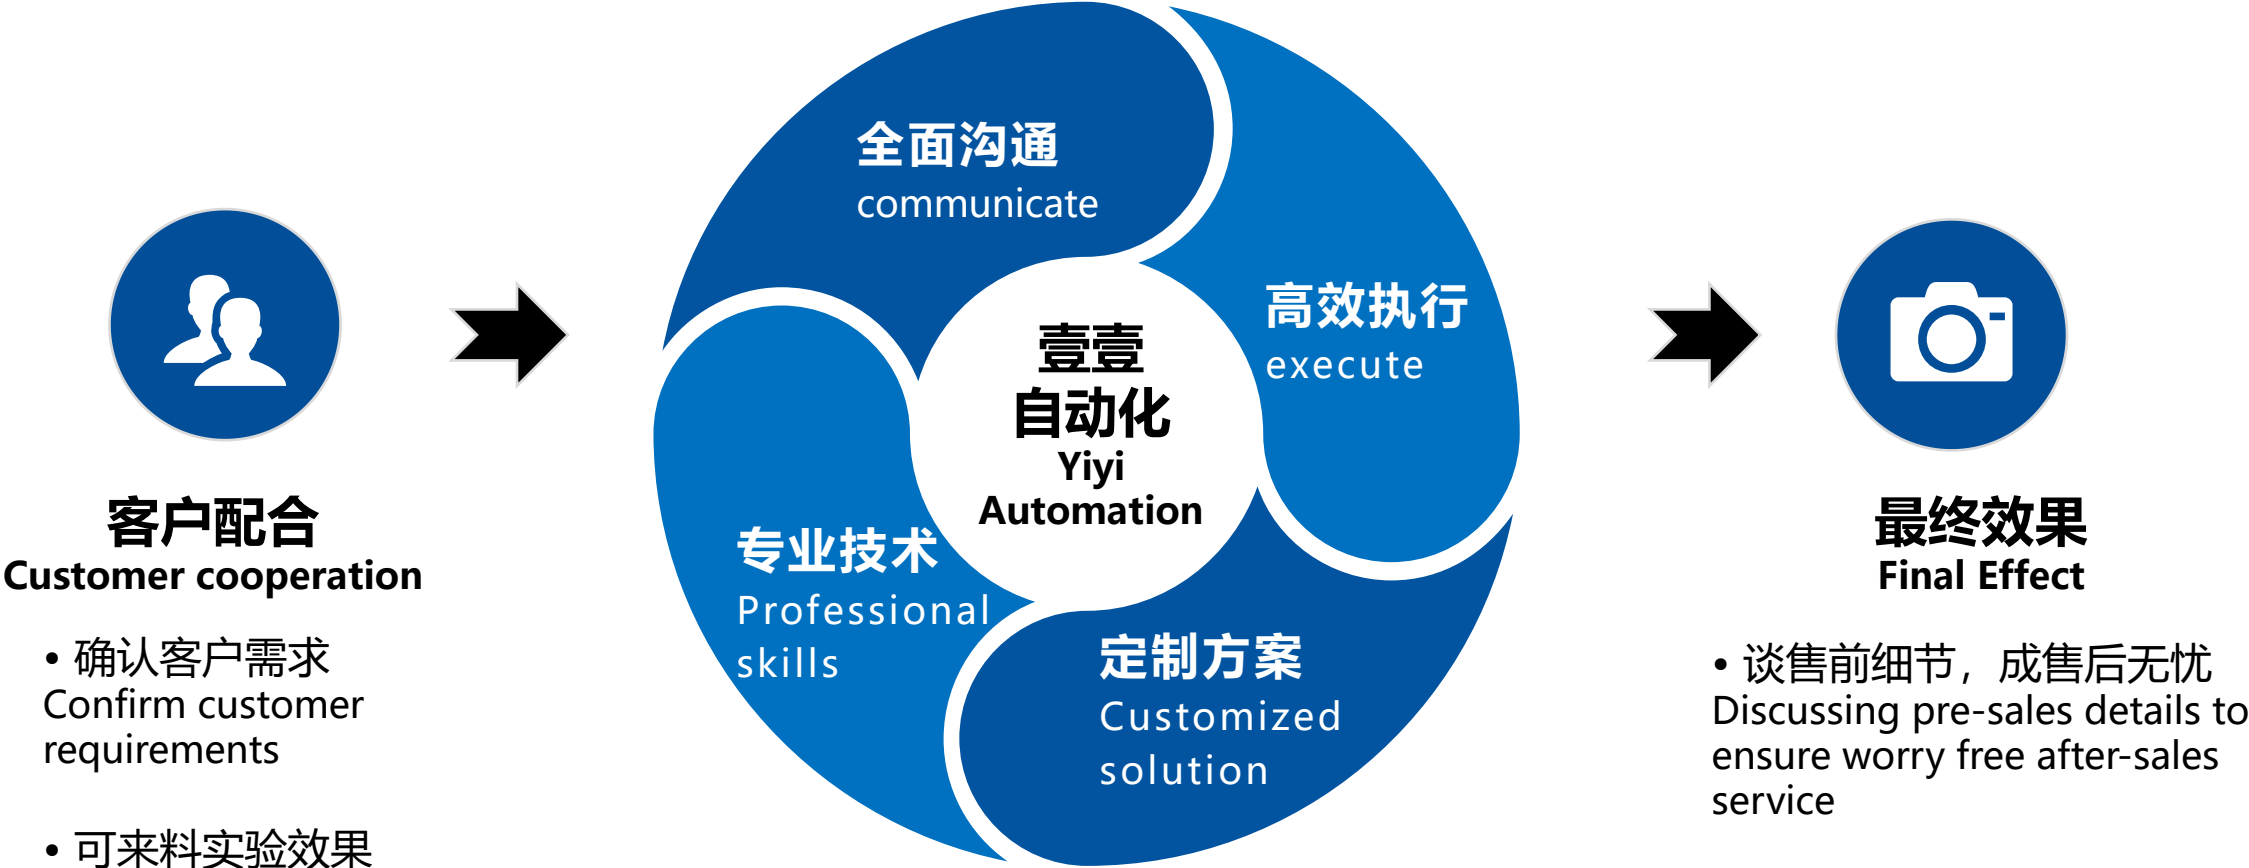

壹壹真空脱泡搅拌机, 全球可定制客户需求
Yiyi vacuum defoaming mixer, globally customizable to meet customer needs



关于我们，四大要点

About us, four key points



强大的研发创新能力

**Strong R&D and
innovation capabilities**



产品+解决方案+服务一体化

**Product+Solution+Service
Integration**



遍布全国的营销服务网络

**A nationwide marketing
service network**



以客户为中心的服务理念

**Customer centered service
philosophy**

服务领域

LED行业

LED industry

- LED灯
LED lamp
- LED环氧树脂
LED epoxy resin
- 锡膏材料
Solder paste material
- 硅胶荧光粉
Silicone fluorescent powder
- ...

材料

material

- 银浆材料
Silver paste material
- 化工材料
Chemicals
- 陶瓷粉末
ceramic powder
- 聚氨酯材料
polyurethane material
- ...

生物医疗

biomedical

- 生物制剂
biological agents
- 玻尿酸
Hyaluronic Acid
- 透明质酸钠
Sodium Hyaluronate
- 凝胶
gel
- ...

新能源

new energy

- 锂电池材料
Lithium battery materials
- 燃料电池材料
Fuel cell materials
- 超级电容器材料
Supercapacitor material
- 太阳能电池材料
Solar cell materials
- ...




功能介绍

Function Introduction

工作原理 Working principle



回转体原图

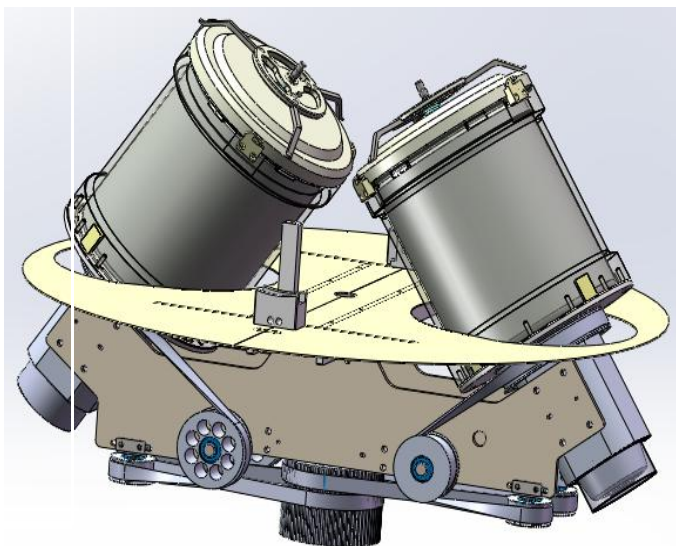

Original image of rotating body

工作原理介绍

Introduction to Working Principle

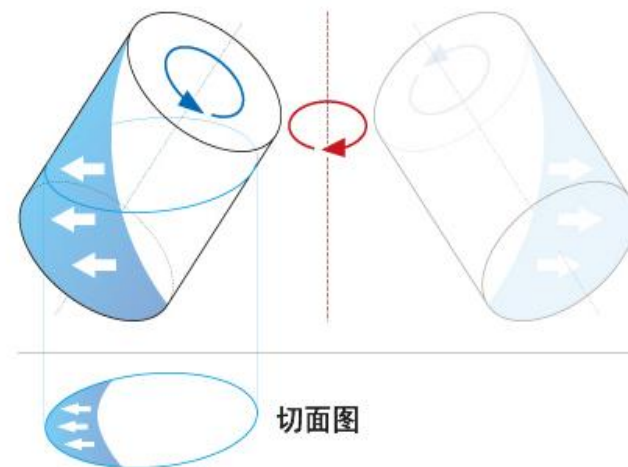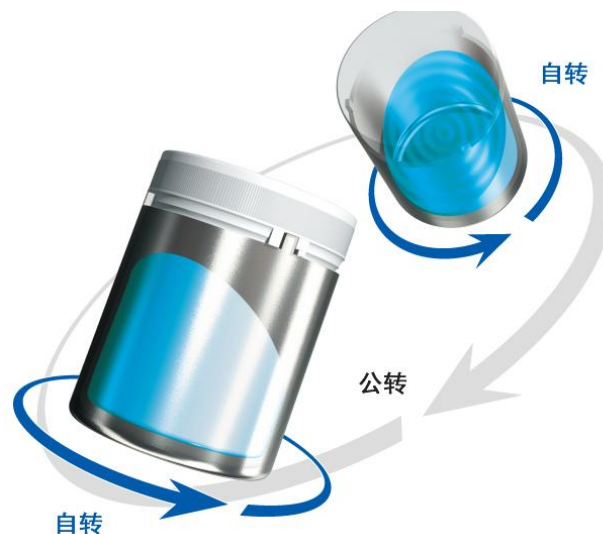

通过公转速度与自转速度的组合，可对应材料的特性与种类进行动作设定，最适合材料的搅拌脱泡在短时间内实现。
By combining the revolution speed and rotation speed, the action can be set according to the characteristics and types of the material, which is most suitable for achieving stirring and defoaming of the material in a short period of time.

通过公转的离心力将材料推压到容器侧壁，材料形成薄膜，同时利用自转使容器侧壁与材料间产生切断力进行搅拌，用真空泵配合抽真空加强对材料的除泡来达到效果。
The material is pushed against the side wall of the container by the centrifugal force of revolution, forming a thin film. At the same time, the rotation is used to generate a cutting force between the side wall of the container and the material for stirring. A vacuum pump is used in conjunction with vacuum pumping to enhance the defoaming of the material to achieve the desired effect.

效果图:



搅拌前 —— 搅拌后

环氧树脂+氧化铝



搅拌前 —— 搅拌后

导电硅脂



搅拌前 —— 搅拌后

锂电池正负极材料



搅拌前 —— 搅拌后

色浆+颜料



搅拌前 —— 搅拌后

组合膏体混合



搅拌后 —— 显微镜观察

UV胶+玻璃珠



技术规格

Technical Specifications



型号规格

Model specifications





A-310AS 技术参数

Technical Parameter

型号: AD-150S model: AD-150S	处理容量:最大75ml*2 Processing capacity: maximum 75 ml*2	标准容器: 150ml PP注塑杯 Standard container: 150ml *2 PP injection molded cup
运行方式:公/自转非接触式搅拌 Operation mode: Public/Self rotating non-contact stirring	自转比:1:0.8不可调 Rotation ratio: 1:0.8 Untunable	公转速度:最大3000转(100-3000可调) Revolution speed: maximum 3000 revolutions (adjustable between 100-3000)
工作腔体:双腔搅拌 Working chamber: dual chamber stirring	运行时间:600秒*5段 Running time: 600 seconds * 5 segments	使用环境:10-35℃湿度35%-80%无凝露 Usage environment: 10-35 °C, humidity 35% -80%, no condensation
泵浦能力:无 Pump capacity: NO	真空能力:无 Vacuum capacity: NO	真空范围:无 Vacuum range: NO
外形尺寸:450*350*400(mm) Dimensions: 450 * 350 *400 (mm)	整机重量:约43Kg Whole machine weight: approximately 43Kg	额定电压:单相220V±10%,50/60Hz Rated voltage: Single-phase 220V ± 10%, 50/60Hz
兼容容器: 不支持针筒 Compatible container: Syringe not supported	安全装置:门锁报警、震动报警、过载报警、 过载保护 Safety devices: door lock alarm, vibration alarm, overload alarm, overload protection	额定功耗待机: 50W 最大功耗: 0.45kW Rated power consumption standby: 50W maximum power consumption: 0.45kW

标配内置真空泵, 可选配外置大功率真空泵 Install vacuum pump, optional external high-power vacuum pump



型号规格

Model specifications





A-310AS 技术参数

Technical Parameter

型号: A-310AS model: A-310AS	处理容量:最大150ml Processing capacity: maximum 150 ml	标准容器: 300ml PP注塑杯 Standard container: 300ml PP injection molded cup
运行方式:公/自转非接触式搅拌 Operation mode: Public/Self rotating non-contact stirring	自转比:最大1:2可调 Rotation ratio: maximum 1:2 adjustable	公转速度:最大3000转(100-3000可调) Revolution speed: maximum 3000 revolutions (adjustable between 100-3000)
工作腔体:单腔搅拌 Working chamber: single chamber agitation	运行时间:600秒*5段 Running time: 600 seconds * 5 segments	使用环境:10-35℃湿度35%-80%无凝露 Usage environment: 10-35 °C, humidity 35% -80%, no condensation
泵浦能力:无 Pump capacity: NO	真空能力:无 Vacuum capacity: NO	真空范围:无 Vacuum range: NO
外形尺寸:400*480*450(mm) Dimensions: 400 * 480 *450 (mm)	整机重量:约47Kg Whole machine weight: approximately 47Kg	额定电压:单相220V±10%,50/60Hz Rated voltage: Single-phase 220V ± 10%, 50/60Hz
兼容容器: 不支持针筒 Compatible container: Syringe not supported	安全装置:门锁报警、震动报警、过载报警、过载保护 Safety devices: door lock alarm, vibration alarm, overload alarm, overload protection	额定功耗待机: 50W 最大功耗: 0.9kW Rated power consumption standby: 50W maximum power consumption: 0.9kW

标配内置真空泵, 可选配外置大功率真空泵 Install vacuum pump, optional external high-power vacuum pump

型号规格

Model specifications





A-680 技术参数

Technical Parameter

型号: A-680 model: A-680	处理容量:最大220ml Processing capacity: maximum 220 ml	标准容器: 500ml PP注塑杯 Standard container: 500ml PP injection molded cup
运行方式:公/自转非接触式搅拌 Operation mode: Public/Self rotating non-contact stirring	自转比:1:0.8不可调 Rotation ratio: 1:0.8 Untunable	公转速度:最大2800转(100-2800可调) Revolution speed: maximum 2800 revolutions (adjustable between 100-2800)
工作腔体:单腔搅拌 Working chamber: single chamber agitation	运行时间:600秒*5段 Running time: 600 seconds * 5 segments	使用环境:10-35℃湿度35%-80%无凝露 Usage environment: 10-35 °C, humidity 35% -80%, no condensation
泵浦能力:20m³/h(油泵) Pump capacity: 20m ³ /h (oil pump)	真空能力:60秒可达0.1kPa Vacuum capacity: up to 0.1Kpa in 60 seconds	真空范围:101.3kPa-0.1kPa可设定 Vacuum range: 101.3kPa-0.1kPa can be set
外形尺寸:490*490*760(mm) Dimensions: 490 * 490 *760 (mm)	整机重量:约120Kg Whole machine weight: approximately 700Kg	额定电压:单相220V±10%,50/60Hz Rated voltage: Single-phase 220V ± 10%, 50/60Hz
兼容容器: 兼容55CC以内针筒 Compatible with syringes within 55CC	安全装置:门锁报警、震动报警、真空报警、过载报警、过载保护 Safety devices: door lock alarm, vibration alarm, vacuum alarm, overload alarm, overload protection	额定功耗待机: 50W 最大功耗: 1.6kW Rated power consumption standby: 50W maximum power consumption: 1.6kW

标配内置真空泵, 可选配外置大功率真空泵 Install vacuum pump, optional external high-power vacuum pump

型号规格

Model specifications





AD-680 技术参数

Technical Parameter

型号: AD-680 model: AD-680	处理容量:最大350ml*2 Processing capacity: maximum 350 ml* 2	标准容器: 700ml*2 PP注塑杯 Standard container: 700ml*2 PP injection molded cup
运行方式:公/自转非接触式搅拌 Operation mode: Public/Self rotating non-contact stirring	自转比:1:0.8不可调 Rotation ratio: 1:0.8 Untunable	公转速度:最大2800转(100-2800可调) Revolution speed: maximum 2800 revolutions (adjustable between 100-2800)
工作腔体:双腔搅拌 Working chamber: dual chamber stirring	运行时间:600秒*5段 Running time: 600 seconds * 5 segments	使用环境:10-35℃湿度35%-80%无凝露 Usage environment: 10-35 °C, humidity 35% -80%, no condensation
泵浦能力:20m³/h(油泵) Pump capacity: 20m ³ /h (oil pump)	真空能力:60秒可达0.1kPa Vacuum capacity: up to 0.1Kpa in 60 seconds	真空范围:101.3kPa-0.1kPa可设定 Vacuum range: 101.3kPa-0.1kPa can be set
外形尺寸:640*640*810(mm) Dimensions: 640 * 640 *810 (mm)	整机重量:约180Kg Whole machine weight: approximately 700Kg	额定电压:单相220V±10%,50/60Hz Rated voltage: Single-phase 220V ± 10%, 50/60Hz
兼容容器: 兼容55CC以内针筒 Compatible with syringes within 55CC	安全装置:门锁报警、震动报警、真空报警、 过载报警、过载保护 Safety devices: door lock alarm, vibration alarm, vacuum alarm, overload alarm, overload protection	额定功耗待机: 50W 最大功耗: 1.6kW Rated power consumption standby: 50W maximum power consumption: 1.6kW

标配内置真空泵, 可选配外置大功率真空泵 Install vacuum pump, optional external high-power vacuum pump

型号规格

Model specifications





AD-680A 技术参数

Technical Parameter

型号: AD-680A model: AD-680A	处理容量:最大350ml*2 Processing capacity: maximum 350 ml* 2	标准容器: 700ml*2 PP注塑杯 Standard container: 700ml*2 PP injection molded cup
运行方式:公/自转非接触式搅拌 Operation mode: Public/Self rotating non-contact stirring	自转比:最大1:2可调 Rotation ratio: maximum 1:2 adjustable	公转速度:最大2800转(100-2800可调) Revolution speed: maximum 2800 revolutions (adjustable between 100-2800)
工作腔体:双腔搅拌 Working chamber: dual chamber stirring	运行时间:600秒*5段 Running time: 600 seconds * 5 segments	使用环境:10-35℃湿度35%-80%无凝露 Usage environment: 10-35 °C, humidity 35% -80%, no condensation
泵浦能力:20m³/h(油泵) Pump capacity: 20m ³ /h (oil pump)	真空能力:60秒可达0.1kPa Vacuum capacity: up to 0.1Kpa in 60 seconds	真空范围:101.3kPa-0.1kPa可设定 Vacuum range: 101.3kPa-0.1kPa can be set
外形尺寸:640*640*810(mm) Dimensions: 640 * 640 *810 (mm)	整机重量:约180Kg Whole machine weight: approximately 700Kg	额定电压:单相220V±10%,50/60Hz Rated voltage: Single-phase 220V ± 10%, 50/60Hz
兼容容器: 兼容55CC以内针筒 Compatible with syringes within 55CC	安全装置:门锁报警、震动报警、真空报警、 过载报警、过载保护 Safety devices: door lock alarm, vibration alarm, vacuum alarm, overload alarm, overload protection	额定功耗待机: 50W 最大功耗: 2.5kW Rated power consumption standby: 50W maximum power consumption: 2.5kW

标配内置真空泵, 可选配外置大功率真空泵 Install vacuum pump, optional external high-power vacuum pump

型号规格

Model specifications





AD-2000A 技术参数

Technical Parameter

型号: AD-2000A model: AD-2000A	处理容量:最大750ml*2 Processing capacity: maximum 750ml * 2	标准容器: 1500ml*2 HDPE杯 Standard container: 1500ml*2 HDPE cup
运行方式:公/自转非接触式搅拌 Operation mode: Public/Self rotating non-contact stirring	自转比:最大1:2可调 Rotation ratio: maximum 1:2 adjustable	公转速度:最大2500转(200-2500可调) Revolution speed: maximum 2500 revolutions (adjustable between 100-2500)
工作腔体:双腔搅拌 Working chamber: dual chamber stirring	运行时间:600秒*5段 Running time: 600 seconds * 5 segments	使用环境:10-35℃湿度35%-80%无凝露 Usage environment: 10-35 °C, humidity 35% -80%, no condensation
泵浦能力:20m³/h(油泵) Pump capacity: 20m³/h (oil pump)	真空能力:40秒可达0.1kPa Vacuum capacity: up to 0.1Kpa in 40 seconds	真空范围:101.3kPa-0.1kPa可设定 Vacuum range: 101.3kPa-0.1kPa can be set
外形尺寸:780*780*960(mm) Dimensions: 780 * 780 * 960 (mm)	整机重量:约250Kg Whole machine weight: approximately 250Kg	额定电压:单相220V±10%,50/60Hz Rated voltage: Single-phase 220V ± 10%, 50/60Hz
兼容容器: 兼容市场大部分针筒 Compatible container: compatible with most syringes in the market	安全装置:门锁报警、震动报警、真空报警、过载报警、过载保护 Safety devices: door lock alarm, vibration alarm, vacuum alarm, overload alarm, overload protection	额定功耗待机: 50W 最大功耗: 3.8kW Rated power consumption standby: 50W maximum power consumption: 3.8kW

标配内置真空泵, 可选配外置大功率真空泵 Install vacuum pump, optional external high-power vacuum pump



型号规格

Model specifications





AD-4000 技术参数

Technical Parameter

型号: AD-4000 model: AD-4000	处理容量:最大2L*2 Processing capacity: maximum 2L * 2	标准容器: 4L*2 HDPE注塑桶 Standard container: 4L*2 HDPE Injection molded barrel
运行方式:公/自转非接触式搅拌 Operation mode: Public/Self rotating non-contact stirring	自转比:1:0.8不可调 Rotation ratio: 1:0.8 Untunable	公转速度:最大1200转(50-1200可调) Revolution speed: maximum 1200 revolutions (adjustable between 50-1200)
工作腔体:双腔搅拌 Working chamber: dual chamber stirring	运行时间:600秒*5段 Running time: 600 seconds * 5 segments	使用环境:10-35℃湿度35%-80%无凝露 Usage environment: 10-35 °C, humidity 35% -80%, no condensation
泵浦能力:20m³/h(油泵) Pump capacity: 20m ³ /h (oil pump)	真空能力:120秒可达0.1kPa Vacuum capacity: up to 0.1Kpa in 120 seconds	真空范围:101.3kPa-0.1kPa可设定 Vacuum range: 101.3kPa-0.1kPa can be set
外形尺寸:1100*1000*950(mm) Dimensions: 1100 * 1000 * 950 (mm)	整机重量:约420Kg Whole machine weight: approximately 420Kg	额定电压:三相380V±10%,50/60Hz Rated voltage: three-phase 380V ± 10%, 50/60Hz
兼容容器: 兼容市场大部分针筒 Compatible container: compatible with most syringes in the market	安全装置:门锁报警、震动报警、真空报警、过载报警、过载保护 Safety devices: door lock alarm, vibration alarm, vacuum alarm, overload alarm, overload protection	额定功耗待机: 50W 最大功耗: 3.9kW Rated power consumption standby: 50W maximum power consumption: 3.9kW

标配内置真空泵, 可选配外置大功率真空泵 Install vacuum pump, optional external high-power vacuum pump



型号规格

Model specifications





AD-4000A 技术参数

Technical Parameter

型号: AD-4000A model: AD-4000A	处理容量:最大2L*2 Processing capacity: maximum 2L * 2	标准容器: 4L*2 HDPE注塑桶 Standard container: 4L*2 HDPE Injection molded barrel
运行方式:公/自转非接触式搅拌 Operation mode: Public/Self rotating non-contact stirring	自转比:最大1:2可调 Rotation ratio:maximum 1:2 adjustable	公转速度:最大1200转(50-1200可调) Revolution speed: maximum 1200 revolutions (adjustable between 50-1200)
工作腔体:双腔搅拌 Working chamber: dual chamber stirring	运行时间:600秒*5段 Running time: 600 seconds * 5 segments	使用环境:10-35℃湿度35%-80%无凝露 Usage environment: 10-35 °C, humidity 35% -80%, no condensation
泵浦能力:20m³/h(油泵) Pump capacity: 20m³/h (oil pump)	真空能力:120秒可达0.1kPa Vacuum capacity: up to 0.1Kpa in 120 seconds	真空范围:101.3kPa-0.1kPa可设定 Vacuum range: 101.3kPa-0.1kPa can be set
外形尺寸:1100*1000*1050(mm) Dimensions: 1100 * 1000 * 1050 (mm)	整机重量:约420Kg Whole machine weight: approximately 420Kg	额定电压:三相380V±10%,50/60Hz Rated voltage: three-phase 380V ± 10%, 50/60Hz
兼容容器: 兼容市场大部分针筒 Compatible container: compatible with most syringes in the market	安全装置:门锁报警、震动报警、真空报警、过载报警、过载保护 Safety devices: door lock alarm, vibration alarm, vacuum alarm, overload alarm, overload protection	额定功耗待机: 50W 最大功耗: 6.5kW Rated power consumption standby: 50W maximum power consumption: 6.5kW

标配内置真空泵, 可选配外置大功率真空泵 Install vacuum pump, optional external high-power vacuum pump



型号规格

Model specifications





AD-6000A 技术参数

Technical Parameter

型号: AD-6000A model: AD-6000A	处理容量:最大3L*2 Processing capacity: maximum 3L * 2	标准容器: 6L*2 HDPE注塑桶 Standard container: 6L*2 HDPE Injection molded barrel
运行方式:公/自转非接触式搅拌 Operation mode: Public/Self rotating non-contact stirring	自转比:最大1:2可调 Rotation ratio:maximum 1:2 adjustable	公转速度:最大800转(50-800可调) Revolution speed: maximum 800 revolutions (adjustable between 50-800)
工作腔体:双腔搅拌 Working chamber: dual chamber stirring	运行时间:600秒*5段 Running time: 600 seconds * 5 segments	使用环境:10-35℃湿度35%-80%无凝露 Usage environment: 10-35 °C, humidity 35% -80%, no condensation
泵浦能力:20m³/h(油泵) Pump capacity: 20m ³ /h (oil pump)	真空能力:120秒可达0.1kPa Vacuum capacity: up to 0.1Kpa in 120 seconds	真空范围:101.3kPa-0.1kPa可设定 Vacuum range: 101.3kPa-0.1kPa can be set
外形尺寸:1300*1070*950(mm) Dimensions: 1300 * 1070 * 950 (mm)	整机重量:约560Kg Whole machine weight: approximately 560Kg	额定电压:三相380V±10%,50/60Hz Rated voltage: three-phase 380V ± 10%, 50/60Hz
兼容容器: 兼容市场大部分针筒 Compatible container: compatible with most syringes in the market	安全装置:门锁报警、震动报警、真空报警、过载报警、过载保护 Safety devices: door lock alarm, vibration alarm, vacuum alarm, overload alarm, overload protection	额定功耗待机: 50W 最大功耗: 7.7kW Rated power consumption standby: 50W maximum power consumption: 7.7kW

标配内置真空泵, 可选配外置大功率真空泵 Install vacuum pump, optional external high-power vacuum pump

型号规格

Model specifications





AD-10LA 技术参数

Technical Parameter

型号: AD-10LA model: AD-10LA	处理容量:最大5L*2 Processing capacity: maximum 5L * 2	标准容器: 10L不锈钢桶*2 Standard container: 10L stainless steel drum * 2
运行方式:公/自转非接触式搅拌 Operation mode: Public/Self rotating non-contact stirring	自转比:最大1:2可调 Rotation ratio: maximum 1:2 adjustable	公转速度:最大500转(50-500可调) Revolution speed: maximum 500 revolutions (adjustable between 50-500)
工作腔体:双腔搅拌 Working chamber: dual chamber stirring	运行时间:600秒*5段 Running time: 600 seconds * 5 segments	使用环境:10-35℃湿度35%-80%无凝露 Usage environment: 10-35 °C, humidity 35% -80%, no condensation
泵浦能力:20m³/h(油泵) Pump capacity: 20m ³ /h (oil pump)	真空能力:40秒可达0.1kPa Vacuum capacity: up to 0.1Kpa in 40 seconds	真空范围:101.3kPa-0.1kPa可设定 Vacuum range: 101.3kPa-0.1kPa can be set
外形尺寸:1490*1140*1060(mm) Dimensions: 1490 * 1140 * 1060 (mm)	整机重量:约700Kg Whole machine weight: approximately 700Kg	额定电压:三相380V±10%,50/60Hz Rated voltage: three-phase 380V ± 10%, 50/60Hz
兼容容器: 兼容市场大部分针筒 Compatible container: compatible with most syringes in the market	安全装置:门锁报警、震动报警、真空报警、过载报警、过载保护 Safety devices: door lock alarm, vibration alarm, vacuum alarm, overload alarm, overload protection	额定功耗待机: 50W 最大功耗: 11kW Rated power consumption standby: 50W maximum power consumption: 11kW

标配内置真空泵, 可选配外置大功率真空泵 Install vacuum pump, optional external high-power vacuum pump

型号规格

Model specifications





AD-10LA (医疗款) 技术参数

Technical Parameter

型号: AD-10LA model: AD-10LA	处理容量:最大5L*2 Processing capacity: maximum 5L * 2	标准容器: 10L不锈钢桶*2 (316L) Standard container: 10L stainless steel drum * 2 (316L)
运行方式:公/自转非接触式搅拌 Operation mode: Public/Self rotating non-contact stirring	自转比:最大1:2可调 Rotation ratio: maximum 1:2 adjustable	公转速度:最大500转(50-500可调) Revolution speed: maximum 500 revolutions (adjustable between 50-500)
工作腔体:双腔搅拌 Working chamber: dual chamber stirring	运行时间:600秒*5段 Running time: 600 seconds * 5 segments	使用环境:10-35℃湿度35%-80%无凝露 Usage environment: 10-35 °C, humidity 35% -80%, no condensation
泵浦能力:20m³/h(油泵) Pump capacity: 20m ³ /h (oil pump)	真空能力:40秒可达0.1kPa Vacuum capacity: up to 0.1Kpa in 40 seconds	真空范围:101.3kPa-0.1kPa可设定 Vacuum range: 101.3kPa-0.1kPa can be set
外形尺寸:1490*1140*1060(mm) Dimensions: 1490 * 1140 * 1060 (mm)	整机重量:约700Kg Whole machine weight: approximately 700Kg	额定电压:三相380V±10%,50/60Hz Rated voltage: three-phase 380V ± 10%, 50/60Hz
兼容容器: 兼容市场大部分针筒 Compatible container: compatible with most syringes in the market	安全装置:门锁报警、震动报警、真空报警、过载报警、过载保护 Safety devices: door lock alarm, vibration alarm, vacuum alarm, overload alarm, overload protection	额定功耗待机: 50W 最大功耗: 11kW Rated power consumption standby: 50W maximum power consumption: 11kW

标配内置真空泵, 可选配外置大功率真空泵 Install vacuum pump, optional external high-power vacuum pump

型号规格

Model specifications





AD-10LA

(医疗款压力罐型)

技术参数

Technical Parameter

型号: AD-10LA model: AD-10LA	处理容量:最大5L*2 Processing capacity: maximum 5L * 2	标准容器: 10L不锈钢压力罐*2 (316L) Standard container: 10L stainless steel pressure tanks *2 (316L)
运行方式:公/自转非接触式搅拌 Operation mode: Public/Self rotating non-contact stirring	自转比:最大1:2可调 Rotation ratio: maximum 1:2 adjustable	公转速度:最大500转(50-500可调) Revolution speed: maximum 500 revolutions (adjustable between 50-500)
工作腔体:双腔搅拌 Working chamber: dual chamber stirring	运行时间:600秒*5段 Running time: 600 seconds * 5 segments	使用环境:10-35℃湿度35%-80%无凝露 Usage environment: 10-35 °C, humidity 35% -80%, no condensation
泵浦能力:20m³/h(油泵) Pump capacity: 20m³/h (oil pump)	真空能力:40秒可达0.1kpa Vacuum capacity: up to 0.1Kpa in 40 seconds	真空范围:101.3kPa-0.1kPa可设定 Vacuum range: 101.3kPa-0.1kPa can be set
外形尺寸:1490*1140*1060(mm) Dimensions: 1490 * 1140 * 1060 (mm)	整机重量:约700Kg Whole machine weight: approximately 700Kg	额定电压:三相380V±10%,50/60Hz Rated voltage: three-phase 380V ± 10%, 50/60Hz
兼容容器: 兼容市场大部分针筒 Compatible container: compatible with most syringes in the market	安全装置:门锁报警、震动报警、真空报警、过载报警、过载保护 Safety devices: door lock alarm, vibration alarm, vacuum alarm, overload alarm, overload protection	额定功耗待机: 50W 最大功耗: 11kW Rated power consumption standby: 50W maximum power consumption: 11kW

标配内置真空泵, 可选配外置大功率真空泵 Install vacuum pump, optional external high-power vacuum pump



型号规格

Model specifications





AD-20LA (医疗款) 技术参数

Technical Parameter


型号: AD-20LA model: AD-20LA	处理容量:最大10L*2 Processing capacity: maximum 10L * 2	标准容器: 20L不锈钢桶*2 (316L) Standard container: 20L stainless steel drum * 2 (316L)
运行方式:公/自转非接触式搅拌 Operation mode: Public/Self rotating non-contact stirring	自转比:最大1:2可调 Rotation ratio: maximum 1:2 adjustable	公转速度:最大500转(50-500可调) Revolution speed: maximum 500 revolutions (adjustable between 50-500)
工作腔体:双腔搅拌 Working chamber: dual chamber stirring	运行时间:600秒*5段 Running time: 600 seconds * 5 segments	使用环境:10-35℃湿度35%-80%无凝露 Usage environment: 10-35 °C, humidity 35% -80%, no condensation
泵浦能力:40m³/h(油泵) Pump capacity: 40m³/h (oil pump)	真空能力:70秒可达0.1kPa Vacuum capacity: up to 0.1Kpa in 70 seconds	真空范围:101.3kPa-0.1kPa可设定 Vacuum range: 101.3kPa-0.1kPa can be set
外形尺寸:1800*1340*1100(mm) Dimensions: 1800 * 1340 * 1100 (mm)	整机重量:约930Kg Whole machine weight: approximately 930Kg	额定电压:三相380V±10%,50/60Hz Rated voltage: three-phase 380V ± 10%, 50/60Hz
兼容容器: 兼容市场大部分针筒 Compatible container: compatible with most syringes in the market	安全装置:门锁报警、震动报警、真空报警、过载报警、过载保护 Safety devices: door lock alarm, vibration alarm, vacuum alarm, overload alarm, overload protection	额定功耗待机: 50W 最大功耗: 12kW Rated power consumption standby: 50W maximum power consumption: 12kW

标配内置真空泵, 可选配外置大功率真空泵 Install vacuum pump, optional external high-power vacuum pump



型号规格

Model specifications

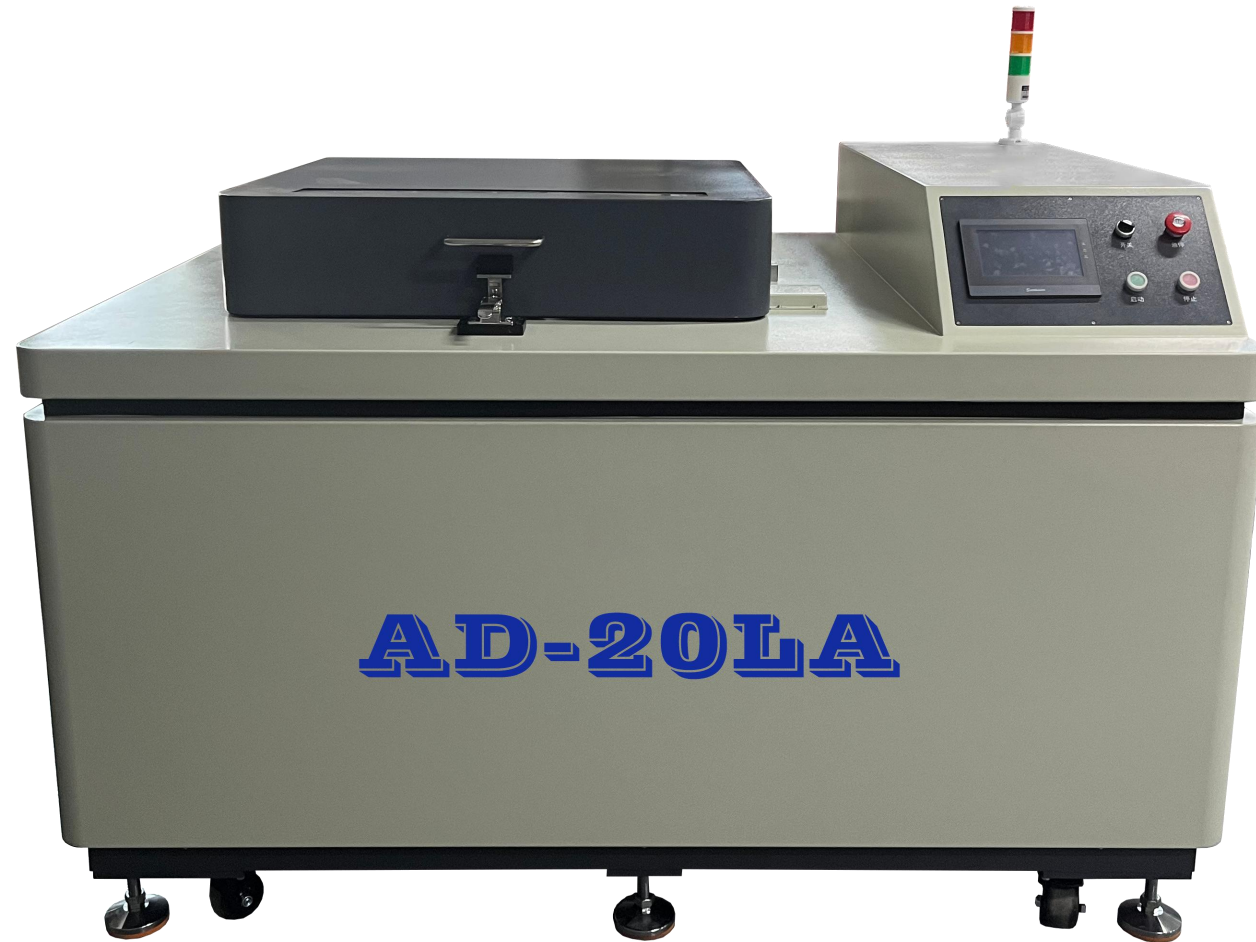



AD-20LA 技术参数

Technical Parameter

型号: AD-20LA model: AD-20LA	处理容量:最大10L*2 Processing capacity: maximum 10L * 2	标准容器: 20L不锈钢桶*2 Standard container: 20L stainless steel drum * 2
运行方式:公/自转非接触式搅拌 Operation mode: Public/Self rotating non-contact stirring	自转比:最大1:2可调 Rotation ratio: maximum 1:2 adjustable	公转速度:最大500转(50-500可调) Revolution speed: maximum 500 revolutions (adjustable between 50-500)
工作腔体:双腔搅拌 Working chamber: dual chamber stirring	运行时间:600秒*5段 Running time: 600 seconds * 5 segments	使用环境:10-35℃湿度35%-80%无凝露 Usage environment: 10-35 °C, humidity 35% -80%, no condensation
泵浦能力:40m³/h(油泵) Pump capacity: 40m ³ /h (oil pump)	真空能力:70秒可达0.1kPa Vacuum capacity: up to 0.1Kpa in 70 seconds	真空范围:101.3kPa-0.1kPa可设定 Vacuum range: 101.3kPa-0.1kPa can be set
外形尺寸:1800*1340*1100(mm) Dimensions: 1800 * 1340 * 1100 (mm)	整机重量:约930Kg Whole machine weight: approximately 930Kg	额定电压:三相380V±10%,50/60Hz Rated voltage: three-phase 380V ± 10%, 50/60Hz
兼容容器: 兼容市场大部分针筒 Compatible container: compatible with most syringes in the market	安全装置:门锁报警、震动报警、真空报警、过载报警、过载保护 Safety devices: door lock alarm, vibration alarm, vacuum alarm, overload alarm, overload protection	额定功耗待机: 50W 最大功耗: 12kW Rated power consumption standby: 50W maximum power consumption: 12kW

标配内置真空泵, 可选配外置大功率真空泵 Install vacuum pump, optional external high-power vacuum pump

型号规格

Model specifications





AD-30LA 技术参数

Technical Parameter

型号: AD-30LA model: AD-30LA	处理容量:最大15L*2 Processing capacity: maximum 15L * 2	标准容器: 30L不锈钢桶*2 Standard container: 30L stainless steel drum * 2
运行方式:公/自转非接触式搅拌 Operation mode: Public/Self rotating non-contact stirring	自转比:最大1:2可调 Rotation ratio: maximum 1:2 adjustable	公转速度:最大300转(50-300可调) Revolution speed: maximum 500 revolutions (adjustable between 50-300)
工作腔体:双腔搅拌 Working chamber: dual chamber stirring	运行时间:600秒*5段 Running time: 600 seconds * 5 segments	使用环境:10-35℃湿度35%-80%无凝露 Usage environment: 10-35 °C, humidity 35% -80%, no condensation
泵浦能力:40m³/h(油泵) Pump capacity: 40m ³ /h (oil pump)	真空能力:100秒可达0.1kPa Vacuum capacity: up to 0.1Kpa in 100 seconds	真空范围:101.3kPa-0.1kPa可设定 Vacuum range: 101.3kPa-0.1kPa can be set
外形尺寸:2100*1550*1250(mm) Dimensions: 2100 * 1550 * 1250 (mm)	整机重量:约1220Kg Whole machine weight: approximately 1220Kg	额定电压:三相380V±10%,50/60Hz Rated voltage: three-phase 380V ± 10%, 50/60Hz
兼容容器: 兼容市场大部分针筒 Compatible container: compatible with most syringes in the market	安全装置:门锁报警、震动报警、真空报警、过载报警、过载保护 Safety devices: door lock alarm, vibration alarm, vacuum alarm, overload alarm, overload protection	额定功耗待机: 50W 最大功耗: 16kW Rated power consumption standby: 50W maximum power consumption: 16kW

标配内置真空泵, 可选配外置大功率真空泵 Install vacuum pump, optional external high-power vacuum pump



型号规格

Model specifications





AD-50LA 技术参数

Technical Parameter

型号: AD-50LA model: AD-50LA	处理容量:最大25L*2 Processing capacity: maximum 25L * 2	标准容器: 50L不锈钢桶*2 Standard container: 50L stainless steel drum * 2
运行方式:公/自转非接触式搅拌 Operation mode: Public/Self rotating non-contact stirring	自转比:最大1:2可调 Rotation ratio: maximum 1:2 adjustable	公转速度:最大300转(50-300可调) Revolution speed: maximum 300 revolutions (adjustable between 50-300)
工作腔体:双腔搅拌 Working chamber: dual chamber stirring	运行时间:600秒*5段 Running time: 600 seconds * 5 segments	使用环境:10-35℃湿度35%-80%无凝露 Usage environment: 10-35 °C, humidity 35% -80%, no condensation
泵浦能力:40m³/h(油泵) Pump capacity: 40m³/h (oil pump)	真空能力:100秒可达0.1kPa Vacuum capacity: up to 0.1Kpa in 100 seconds	真空范围:101.3kPa-0.1kPa可设定 Vacuum range: 101.3kPa-0.1kPa can be set
外形尺寸:2280*1750*1450(mm) Dimensions: 2280 * 1750 * 1450 (mm)	整机重量:约3150Kg Whole machine weight: approximately 1220Kg	额定电压:三相380V±10%,50/60Hz Rated voltage: three-phase 380V ± 10%, 50/60Hz
兼容容器: 兼容市场大部分针筒 Compatible container: compatible with most syringes in the market	安全装置:门锁报警、震动报警、真空报警、过载报警、过载保护 Safety devices: door lock alarm, vibration alarm, vacuum alarm, overload alarm, overload protection	额定功耗待机: 50W 最大功耗: 25kW Rated power consumption standby: 50W maximum power consumption: 25kW

标配内置真空泵, 可选配外置大功率真空泵 Install vacuum pump, optional external high-power vacuum pump



公司荣誉

Company Honors


荣誉资质

壹壹自动化部分专利/商标



服务案例

部分合作伙伴 COMPANY PARTNER




THANKS

期待与您合作共赢



微信号



抖音号

联系人：温余沛

联系电话：18988797670

地址：深圳市光明区公明社区第一工业区15号201

网址：www.yiyiauto.com